



# ET-3000



- 18 mph speed
- 30 mi range
- 3000 lb load capacity\*

## TOUGH & DEPENDABLE PRODUCT SOLUTIONS



The ET-3000 electric utility vehicle competes with gasoline vehicles in outdoor applications. This vehicle operates at 18 mph and carries loads up to 3,000 lb. Specifically designed to meet rugged outdoor applications, the ET-3000 is equipped with a 48 volt drive train that travels up to 30 miles in a single charge.

Taylor-Dunn's GT Drive system provides smooth acceleration while carrying heavy cargo during daily applications. ET-3000 standard features include: metal cab and doors, load range E tires, durable frame design, four-wheel hydraulic brakes and heavy duty drive train that ensures reliability and low maintenance costs.

Visit our website for images, videos, information, and custom modification ideas at [taylor-dunn.com](http://taylor-dunn.com).

<b>VOLTAGE</b>	48 volt	
<b>SPEED</b>	18 mph	29 km/h
<b>RANGE</b>	30 mi	48 km
<b>LOAD CAPACITY</b>	3000 lb	1361 kg
<b>TOW CAPACITY</b>	10,000 lb	4536 kg
<b>BED SIZE (WxL)</b>	49x78 in	124x197 cm
<b>TURNING RADIUS</b>	145 in	368 cm

\* Based on Standard Configuration

Actual towing capacity is dependent on application, vehicle configuration, ballast weight, operating environment, and vehicle maintenance.

Note: Photos are shown with optional features.

### FEATURES & BENEFITS:



- Optional AC drive train
- Zero emissions
- Smooth, quiet operation
- Customizable to fit your application



# ET-3000


## PERFORMANCE

LOAD CAPACITY	3000 lb	1361 kg
MAX SPEED (UNLOADED)	18 mph	29 km/h
TURNING RADIUS	145 in	368 cm
TOW CAPACITY	10,000 lb	4536 kg

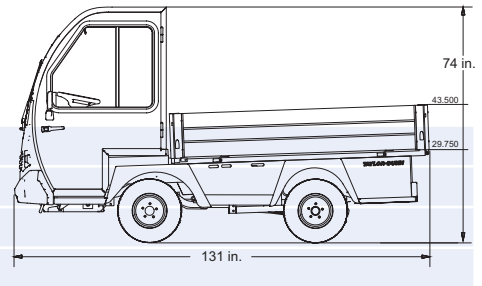

## DIMENSIONS

OVERALL LENGTH	131 in	333 cm
OVERALL WIDTH	51 in	130 cm
OVERALL HEIGHT	74 in	188 cm
WHEEL BASE	51 in	130 cm
BED SIZE (W x L)	49x78 in	124x197 cm

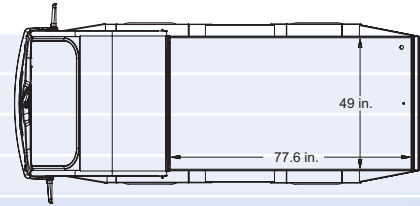

## POWER SUPPLY / DRIVE TRAIN

MOTOR	16.3 hp, 5.9 kW, DC, Separately Excited
SYSTEM VOLTAGE	48V DC
DRIVE AXLE	Helical Gear, Oil Bath Transaxle, GT Automotive Differential, Single Speed
BATTERIES	225 Amp-hour, Lead Acid, 6 Volt, 8 each
CHARGER	48V, Built-in Automatic w/ Interlock, 1 kW, 115 VAC, 17 Amp SCR Control
CONTROLLER	Solid State Speed Controller

## CHASSIS

FRAME	Fully Welded, Unitized, 14 Gauge, Smooth Skin Steel Body, Steel Cab & Lockable Doors, Sliding Windows, Removable Aluminum Drop-Down Sides
STEERING	Automotive Type
SUSPENSION	Leaf Springs w/ Front Shock Absorbers and Rear Overload Load Coil Springs
BRAKES	4 Wheel, Hydraulic Disc, Hand-Operated Parking Brake
BUMPERS	Heavy Duty Steel Rear, Shock Absorbing ABS Front
TIRES	Pneumatic 20.5 x 8 x 10 Load Range E

## GENERAL

UNIT WEIGHT	2475 lb	1123 kg
SEATS	Split Seat w/ Full Length Back Rest, Black Vinyl, Driver Seat Interlock, Seat Belts	
INSTRUMENTATION	Smart View Display (battery status indicator, hour meter, fault code display), Reverse Alarm, F-N-R Switch, Key Switch, Electric Horn, DC/DC Converter (on with key switch), Windshield Wiper Switch, Headlight Switch, Rear & Side View Mirrors	
LIGHT ACCESSORIES	Headlights, Tail Lights, Brake Lights, Directional Signals	
CONFORMANCE	Type E, ANSI, B56.8, OSHA 1910.178	

## OPTIONS:

- STROBE LIGHT
- LOCKABLE CARGO BOX
- BATTERY WATERING SYSTEM
- DOME LIGHT
- PORTABLE CHARGER
- PROGRAMMABLE SECURITY LOCK
- SUN VISORS
- AC DRIVE TRAIN
- POWER CUT-OFF SWITCH
- STAKE SIDES
- VARIOUS HITCHES
- HYDRAULIC DUMP BED
- LADDER RACK
- EXTENDED BED
- CUSTOM PAINT COLOR
- HEATER
- STEEL PANEL BOX
- UNDERCOATING/GALVANIZING



Specifications, standard equipment, accessories and modifications are subject to change without notice.  
Your actual range will vary depending on how you drive and maintain your vehicle.